


# HEA

---

# ECO 17

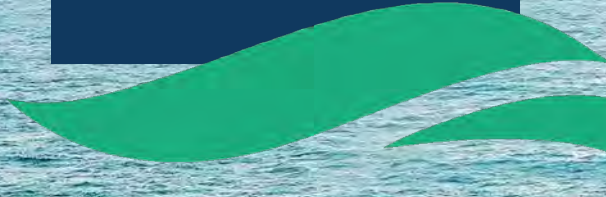

Floor 18, Al Khatem Tower, ADGM Square, Al Maryah  
Island. Abu Dhabi, PO Box 4341, United Arab Emirates  
corporate@hea-energy.com  
+97125855173

# HEA ECO 17

A next-generation offshore construction vessel, purpose-built in 2026 to support a wide range of offshore operations with efficiency and versatility. Designed to accommodate up to 100 personnel, it features a hybrid Integrated Electric Propulsion System (IEPS), advanced battery storage, and DPS-2 dynamic positioning. With a high-capacity main crane, spacious open deck, and full compliance with modern safety and class standards, HEA ECO 17 delivers reliable performance while aligning with the latest sustainability and operational excellence requirements.

## CLASSIFICATION AND RULES

Type:	Offshore Construction Vessel
Built:	2026
Yard:	Honghua Offshore, China
Class:	ABS + A1 (E) Offshore Support Vessel, SPS, + AMS, FFV1, HYBRID IEPS [LEE, PMT], ESS-LIBATTERY + DPS-2, UWILD, BWT, MLC-ACCOM, CRC, RW

Flag:	Panama
IMO:	1127790

## MAIN DIMENSIONS

Length (overall):	69.8m
Length Waterline:	69.33m
Width overall:	17.6m
Hull depth:	6.0m
Design Draft:	3.5m
Scantling Draft:	4.5m
Deadweight:	2,000T
Working Deck:	520m <sup>2</sup>
Deck Loading:	7.5mt/m <sup>2</sup>
GRT/NRT:	3,173/951 T

## CAPACITIES

Fuel Oil:	648m <sup>3</sup>
Fresh Water:	958m <sup>3</sup>
Ballast/Drill Water:	1500m <sup>3</sup>

## DECK EQUIPMENT

Capstan:	2 x Electro-Hydraulic Drive (Vertical) 50KN
Tugger Winch:	2 x Elec-Hyd Drive with 1 mooring drum, 100 KN
Anchor Windlass:	1 x Electro-Hydraulic Drive Anchor, 100 KN, 44 mm
Sewage treatment:	1 x 100 Persons Per Day
Water Maker:	2 units x 15m <sup>3</sup> /day RO

## GENERATORS

Main Engine:	4 x Cummins CCFJ1350-Z-W-MTCM 1350kW @ 1800 rpm,
Em,cy Gen	1 x Cummins CCFJ250-Y-W-MTCM 250 kW @ 1800 rpm
Battery:	3 x 172.2 KWh (500 KWh), LFP Battery system with BMS, 690V

## CRANES

Main crane	Telescopic Boom
Boom length:	36m
Main Hoist:	Hs=1.5m, 70t@ 6.5-8.5m, 20t@ 20m Hs=2.0m, 50t@ 6.5-8.5m, 15t@ 20m
Subsea 55m:	Hs=2m, 70t@ 6.5-8.5m, 20t@ 20m
Aux Hoist:	Hs=1.5m, 10t@ 7-30m, 6t@ 7-36m Hs=2.0m, 8t@ 7-30m, 5t@ 7-36m
Subsea 55m:	Hs=2m, 4t@ 7-30m, 2t@ 7-36m
Personnel:	Hs=2m, 2t@ 7-36m
Auxillary Crane:	1 x Pedestal
Capacities:	3 ton @ 3.3-13.5 m

## SAFETY SYSTEMS

Fire and gas detectors throughout the whole vessel in full compliance with MODU requirements.

2 x 50 POB/Lifeboats  
4 x 25 men inflatable life-rafts.

## PROPULSION UNITS

Thrusters:	2 x Azimuth (TLAT2000WM) 1470 KW @ 1020 rpm 2 x Bow (TLTT165-CP), 700 KW @1180 rpm, 110 KN thrust
Speed:	12 kts @ 4.5m draught

## EXTERNAL FIRE-FIGHTING

Fire Monitor:	2 x 1200 m <sup>3</sup> /h (1 foam)
Fire Pump:	2 x 1830 m <sup>3</sup> /h @117m

## DYNAMIC POSITIONING SYSTEM

### K-POS DP-21

K-Pos OS Operator Station (2), cWing Terminal (1), cWing Connection Box (3), K-Pos DPC-2 Dual Redundant Controller (1), UPS (2), Printer (1), Portable Joystick wing (1), DGPS (2), MRU (3), Ultrasonic wind anemometer (3), Laser Based position reference terminal (1).

## ACCOMMODATION AND FACILITIES

### Standard accommodation:

100 total POB  
12 x 1 men berth  
20 x 2 men berth  
12 x 4 men berth

Cabins equipped with en-suite shower/toilet, telephone, TV/DVD and network connections.

### Facilities

Galley, mess room, client offices, meeting room, recreation rooms, gym, sick bay, laundry, stores and workshops